

# A<sup>2</sup>SI-E

Advanced AS-Interface IC

## Features

- AS-i Complete Specification V2.11 compliant
- Integrated EEPROM
- Additional addressing channel using an opto-electronic interface
- Extended address mode operation as programmable option (up to 62 slaves)
- High impedance AS-i line input, additional pins for further impedance optimizations
- DC voltage output, approximately 24 volts, not stabilized
- 5 volt DC voltage output, stabilized, CMOS logic can be supplied directly (e.g.  $\mu\text{C}$ )
- LED status indicator output (compliant with the standard indication recommendation)
- Integrated watchdog
- Temperature range  $-25^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$

## Description

A<sup>2</sup>SI-E is a monolithic CMOS integrated circuit certified for AS-i (Actuator Sensor-interface) networks. AS-i networks are intended for industrial automation.


The main advantage of AS-i solutions is that actuators and sensors are connected using a two-wire unshielded cable that is easy to install. This cable transports both power and information/data.

AS-i network communication is based on the master-slave principle. The network can be extended (to cable lengths greater than 100m) by using the A<sup>2</sup>SI-E in the repeater mode configuration. Furthermore, the A<sup>2</sup>SI-E is used as slave interface to sensors / actuators and as master interface.

AS-i is a standard for the automation industry based on IEC 62026-2 and EN 50295.

The device is available in a 28-pin SOP (300 mils) package.

## Block Diagram

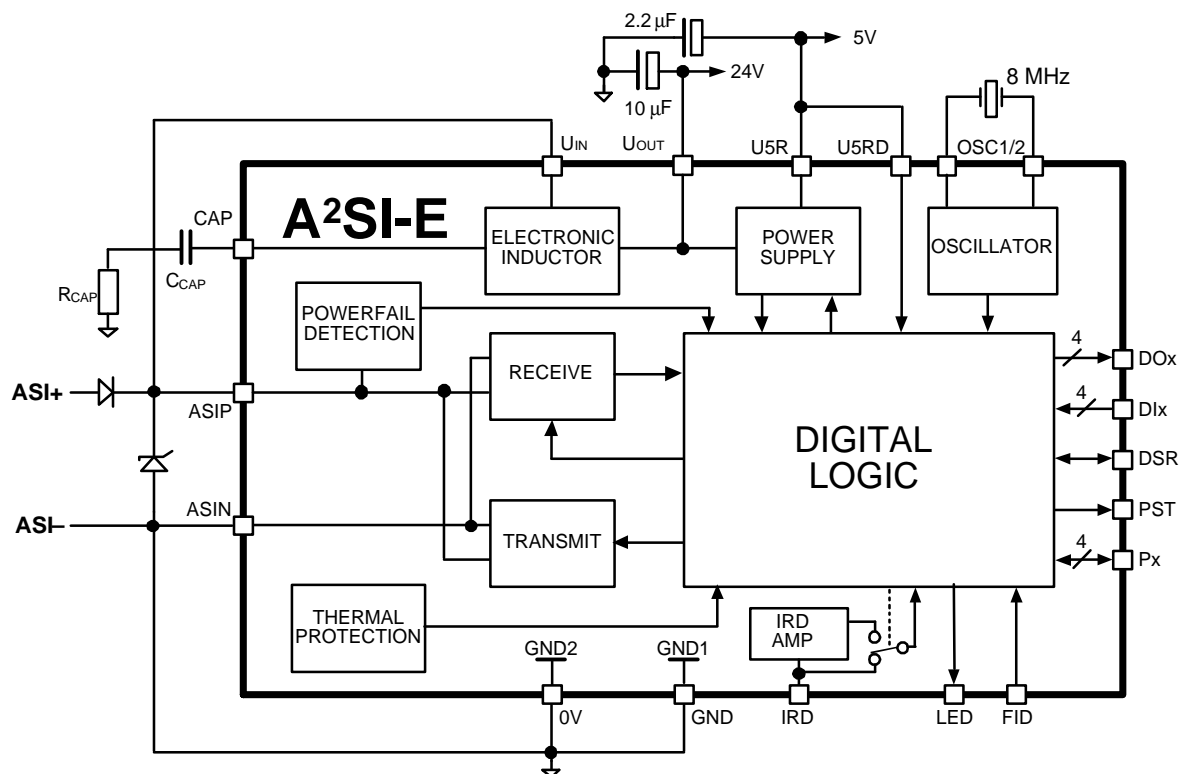


# A<sup>2</sup>SI-E

Advanced AS-Interface IC

## Application

The A<sup>2</sup>SI-E is packaged in 28-pin SOP, which exhibits a lower thermal resistance than the 28-pin SSOP package of A<sup>2</sup>SI IC.

Besides applications that require higher operating ambient temperature than possible with A<sup>2</sup>SI, A<sup>2</sup>SI-E accommodates applications which require a higher power dissipation of the integrated circuit. The thermal resistance of the SOP package of the A<sup>2</sup>SI-E integrated circuit is ideal for master and/or repeater applications.

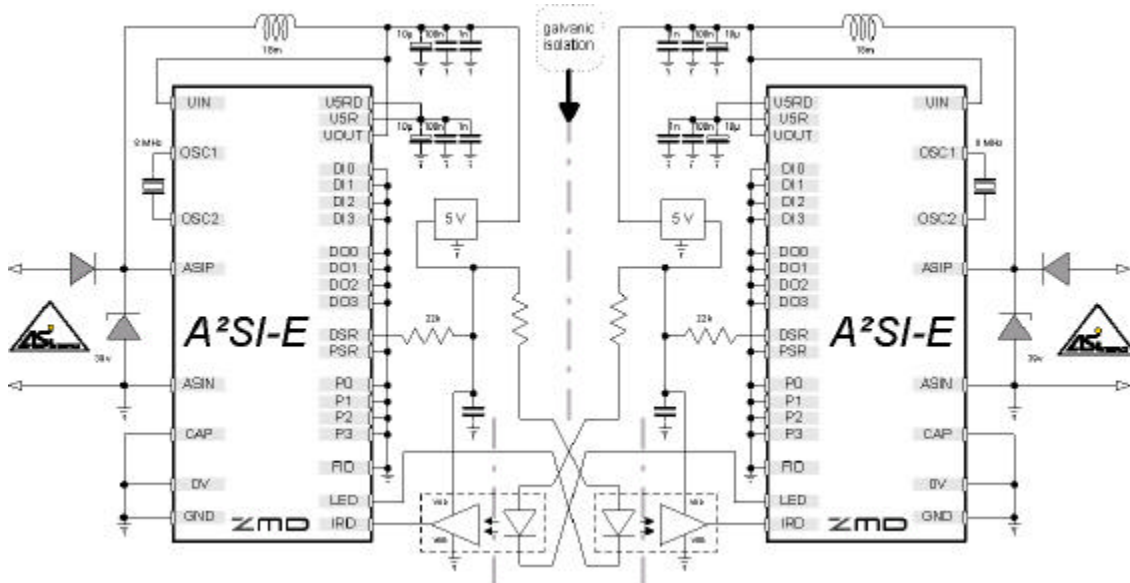

## Ordering Information

Ordering Code	Description	Operating Temperature Range	Package Type	Device Marking	Shipping Form
A2SI-E-ST	Standard version of A <sup>2</sup> SI-E	-25°C to 105°C	28-pin SOP (300 mils)	A <sup>2</sup> SI-E	Tubes (27 parts/tube)
A2SI-E-SR	Standard version of A <sup>2</sup> SI-E	-25°C to 105°C	28-pin SOP (300 mils)	A <sup>2</sup> SI-E	Tape-and-Reel (1000 parts/reel)
A2SI-E-MT	Pre-programmed master function	-25°C to 105°C	28-pin SOP (300 mils)	A <sup>2</sup> SI-E + yellow dot	Tubes (27 parts/tube)
A2SI-E-MR	Pre-programmed master function	-25°C to 105°C	28-pin SOP (300 mils)	A <sup>2</sup> SI-E + yellow dot	Tape-and-Reel (1000 parts/reel)

### For further information:

ZMD Stuttgart Office  
 Nord-West-Ring 34  
 70974 Filderstadt- Bernhausen  
 Tel.: +49 (0)711.674.517-0  
 Fax: +49 (0)711.674.517-99  
 sales@zmd.de

ZMD AG  
 Grenzstrasse 28  
 01109 Dresden, Germany  
 Tel.: +49 (0)351.8822.310  
 Fax: +49 (0)351.8822.337  
 sales@zmd.de

ZMD America Inc.  
 201 Old Country Road, Ste 204  
 Melville, NY 11747  
 Tel.: (631) 549-2666  
 Fax: (631) 549-2882  
 sensors@zmda.com

